



• **SFM-1443S**




**FEATURES:**

- Super miniature
- Super thin
- Low current


**APPLICATIONS:**

- PDA (personal digital assistant)
- Miniature electronic device

**DIMENSIONS: (Unit: mm)**

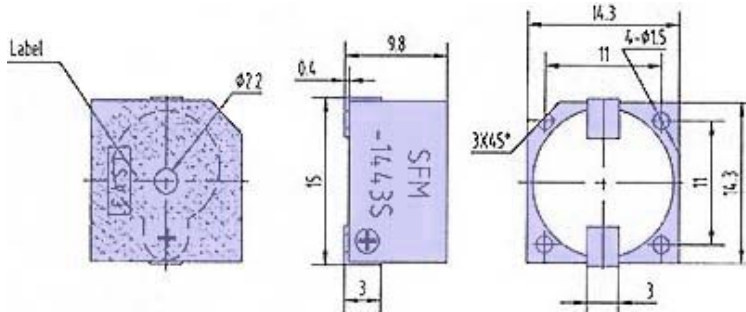

**CHARACTERISTICS:**

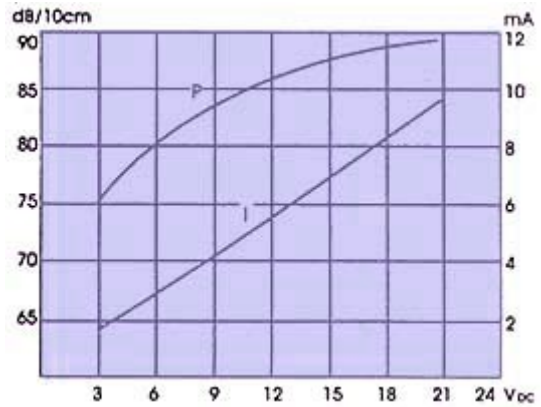


**ELECTRICAL SPECIFICATIONS :**

Model No.	SFM-1443S
Min. Sound Pressure Level (dB)	82 /12V <sub>DC</sub> /10cm
Rated Voltage (V <sub>DC</sub> )	12
Operating Voltage (V <sub>DC</sub> )	6 ~ 16
Resonant Frequency (kHz)	4.0 ± 0.5
Rated Current (mA)	8 ~ 12V <sub>DC</sub>
Operating Temperature (°C)	-40 ~ +85
Tone Nature	Continuous
Weight (g)	2.0
Case Material/Colour	PPS /Black

**TAPE TYPE INFORMATION:**


The design for such tape packing was executed under standard IEC -286-3  
The material of the tape is polystyrene in black color. detailed dimensions are as below :

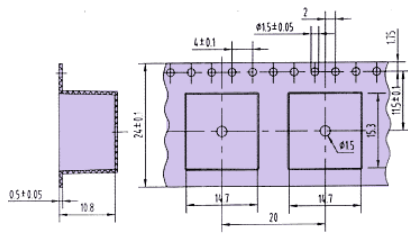

**PACKING INFORMATION:**

**DIMENSIONS OF THE ROLLING PLATE:**

The material of the rolling plate is in paper;  
The dimensions of the rolling plate are as below:

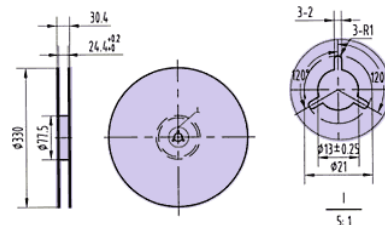

**PACKING DIMENSIONS AND QUANTITY:**

- The rolling plate is put into a 340X335X35mm inner packing box and is packed with 300 pcs of the transducer per plate
- The dimension of the outer carton is 400X350X350mm containing 10 inner boxes with a total quantity of 3000 pcs of the transducer
- The total gross weight per carton is 13Kgs, while net weight is 7.2Kgs.