

TX12E-1C-SAW-433
 TX12E-2C-SAW-433
 TX12E-4C-SAW-433

1/2/4 Chs keyfob transmitters with HT12E encoder





Description

1/2/4 channels RF transmitters with SAW filter oscillator.
 Ideal for remote control applications. High efficiency and low spurious emission.
 In compliance with European Normative.

Descrizione

Trasmettitore palmare RF con risonatore SAW, a 1-2-4 canali.
 Ideale per applicazioni ove si richiedano comandi codificati, alta efficienza e bassa emissione di spurie.
 Conforme alle Normative Europee.

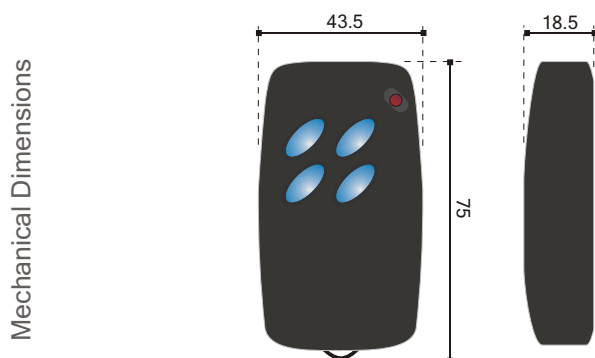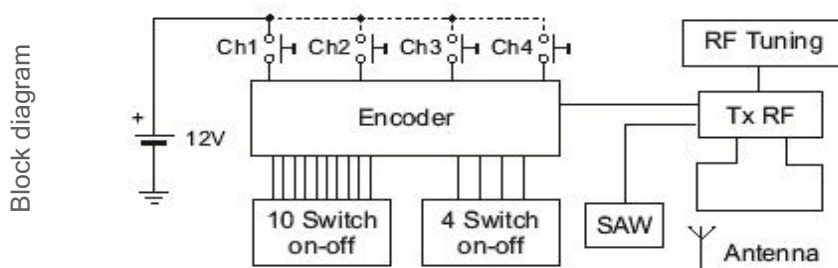

■ All dimensions are in millimeters

1/2/4 Chs keyfob transmitters with HT12E encoder

Technical Specification

Ta = 25 °C

Characteristics	Min	Typ	Max	Unit
Battery supply		12		Vdc
Supply Current		7		mA
RF carrier frequency		433.92		MHz
Effective radiated power			1	mW
Encoder clock frequency ⁽¹⁾		2800		Hz
Codes			4096	
Operating temperature range	-10		+55	°C

⁽¹⁾Tolerance: ±15%

Specifiche Tecniche

Ta = 25 °C

Caratteristiche	Min	Tip	Max	Unità
Alimentazione con batteria		12		Vdc
Corrente assorbita		7		mA
Frequenza portante RF		433.92		MHz
Potenza irradiata			1	mW
Frequenza di clock encoder ⁽¹⁾		2800		Hz
Combinazioni			4096	
Temperatura di lavoro	-10		+55	°C

⁽¹⁾Tolleranza: ±15%

Part Number / Model



650200919
mod.TX12E-1C-SAW-433




650200918
mod.TX12E-2C-SAW-433
(VEDI NOTA)



650200917
mod.TX12E-4C-SAW-433

NOTA: per rendere compatibile (a livello di decodifica) il TX12E-2C-SAW-433 (cod. 650200918) con i precedenti TX3750-2C-SAW-433 (cod. 650200312) occorre impostare il dip switch interno a 4 vie come sotto indicato:



ON